

## A1

(43) International Publication Date: 21 March 1996 (21.03.96)

**(81) Designated States:** AM, AT, AT (Utility model), AU, BB, BG,

**(81) Designated States:** AM, AT, AT (Utility model), AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

**Published**  
*With international search report.*

(72) Inventors; and  
(75) Inventors/Applicants (for US only): IGGULDEN, Jerry [US/US]; 21600 Cleardale Street, Santa Maria, CA 91321 (US). FIELDS, Kyle [US/US]; 1042 Uplands Drive, El Dorado, CA 95762 (US). MCFARLAND, Alan [US/US]; Suite 4, 10761 Burbank Boulevard, North Hollywood, CA 91601 (US).

(74) Agents: HOOVER, George, W. et al.; Blakely, Sokoloff, Taylor & Zafman, 7th floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025-1026 (US).

The diagram illustrates a video cassette recorder system, designated by the reference numeral 10. The system's architecture is as follows:

- Audio Path:** **AUDIO IN** is connected to a **MUTING DETECTOR** (110). The output of the muting detector is connected to **AUDIO OUT**. Additionally, the **AUDIO IN** line is connected to an **AUDIO EVENT DETECTOR** (104), which in turn provides input to the **COMMERCIAL ELIMINATION MICROPROCESSOR** (114).
- Video Path:** **VIDEO IN** is connected to a **VIDEO SWITCH** (136). The output of the video switch is connected to **VIDEO OUT**. The **VIDEO IN** line also branches off to an **EVENT DETECTION VIDEO OBSERVER** (108). The output of this observer is connected to a **VIDEO EVENT DETECTOR** (102), which provides input to the **COMMERCIAL ELIMINATION MICROPROCESSOR** (114).
- Control and Timing:**
  - The **COMMERCIAL ELIMINATION MICROPROCESSOR** (114) is the central control unit, connected to a **RAM** (116) and a **ROM** (118).
  - It is also connected to a **REAL-TIME TIME COUNTER** (122) via a **VIDEO CONTROL MICROPROCESSOR** (120).
  - The **VIDEO CONTROL MICROPROCESSOR** (120) is connected to a **TRANSPORT CONTROL** (124).
  - The **COMMERCIAL ELIMINATION MICROPROCESSOR** (114) is connected to a **CTL SIGNAL GENERATOR** (132) and a **CTL SIGNAL DECODER** (134).
  - The **CTL SIGNAL GENERATOR** (132) is connected to a **CTL HEAD** (130).
  - The **CTL SIGNAL DECODER** (134) receives input from the **CTL HEAD** (130) and provides output to the **COMMERCIAL ELIMINATION MICROPROCESSOR** (114).
- Other Components:**
  - A **VIDEO OBSERVER** (138) is connected to the **VIDEO IN** line.
  - An **EVENT DETECTION AND TIMER** (106) is connected to the **EVENT DETECTION VIDEO OBSERVER** (108) and provides input to the **COMMERCIAL ELIMINATION MICROPROCESSOR** (114).
  - USER CONTROLS** (126) are connected to the **COMMERCIAL ELIMINATION MICROPROCESSOR** (114). These controls include **MODE OFF**, **MANUAL**, **AUTO**, and **STOP** functions.

A video recording and playback device (10) incorporates a processor (114) for processing the video signal to detect the presence of commercial messages. Video and audio event detectors (102, 104) detect the presence of events in the signal as it is recorded. The timing relationship of the detected events is analyzed to classify the video segments between events as program material or as commercial messages. After a program is recorded, control marks are generated (132) to indicate the beginning and end of commercial groups so that they will be skipped during subsequent replay of the recorded program.



AU9536802

**(12) PATENT ABRIDGMENT (11) Document No. AU-B-36802/95**  
**(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 694568**

(54) Title  
**METHOD AND APPARATUS FOR ELIMINATING TELEVISION COMMERCIAL MESSAGES**

International Patent Classification(s)  
(51)<sup>6</sup> **H04N 005/76**

(21) Application No. : **36802/95** (22) Application Date : **11.09.95**

(87) PCT Publication Number : **WO96/08921**

(30) Priority Data

(31) Number	(32) Date	(33) Country
<b>304781</b>	<b>12.09.94</b>	<b>US UNITED STATES OF AMERICA</b>

(43) Publication Date : **29.03.96**

(44) Publication Date of Accepted Application : **23.07.98**

(71) Applicant(s)  
**ARTHUR D. LITTLE ENTERPRISES, INC.**

(72) Inventor(s)  
**JERRY IGGULDEN; KYLE FIELDS; ALAN MCFARLAND**

(74) Attorney or Agent  
**DAVIES COLLISON CAVE , 1 Little Collins Street, MELBOURNE VIC 3000**

(56) Prior Art Documents  
**US 5333091**  
**US 5151788**  
**US 4752634**

(57) Claim

1. A video recording and playback system comprising:

(a) a video recorder/player having a record mode, a play mode and a fast scan mode;

(b) a recording medium for insertion into the video recorder/player so as to record a video signal thereon in the record mode and play the video signal recorded thereon in the play mode, said video signal including program material of first and second categories;

(c) event detection means for detecting events within the video signal;

(d) means for marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;

(e) a data memory for storing times of occurrence of the events detected in the record mode;

**(11) AU-B-36802/95**  
**(10) 694568**

**-2-**

(f) means for analyzing the events to classify segments of the video signal as containing program material of one of the first category and second category;

(g) means for positioning the recording medium to beginning and ending positions of each segment of the video signal classified as containing program material of the second category;

(h) means for marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions and with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

15. A method of processing a video signal recorded on a recording medium comprising the steps of:

(a) replaying the recorded video signal to detect events therein;

(b) marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;

(c) storing data representative of a time of occurrence of each event;

(d) analyzing the data to classify segments of the video signal between events as one of a first and second category;

(e) positioning the recording medium to beginning and ending positions of each segment of the video signal classified as the second category;

(f) marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions;

(g) marking the recording medium with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

b

## **METHOD AND APPARATUS FOR ELIMINATING TELEVISION COMMERCIAL MESSAGES**

### **BACKGROUND OF THE INVENTION**

#### **1. Field of the Invention**

This invention relates to the field of video recording and playback systems, and particularly to a method and apparatus for selectively omitting certain program content during playback of a recorded video signal.

#### **2. Background Art**

It is commonplace to record a commercially broadcast television program on a video tape recorder (VTR, also referred to as a video cassette recorder or VCR) for viewing at a later time. When later viewing the recorded program, many, if not most, viewers prefer to watch only the program material without also viewing commercials, promotional messages and the like that are typically broadcast at intervals during the program.

Even before the advent of popularly priced video tape recorders, there have been many attempts to provide home television viewers with a system to suppress commercial messages. Early efforts included systems that would mute the audio signal for a predetermined period of time when a commercial message was sensed. As VCRs became more popular and "time-shifting" became a convenient way to view television programs, more sophisticated methods for eliminating commercial messages have been proposed.

2

One prior art approach to commercial elimination has been to pause the VCR in the record mode when a commercial message is sensed. A system of this type is disclosed in U.S. Patent No. 4,319,206, which issued on March 9, 1982 to Hanpachem. In this system, the absence of video modulation during a video frame (i.e., a blank frame) is detected and used to trigger a timing circuit. When triggered, the timing circuit causes a pause command to be sent to a video tape recorder. The pause command remains asserted for a predetermined period of time, or longer if the timing circuit is retriggered. For example, the timing circuit may be set for 32 seconds so that if blank frames are detected at 30 second intervals (a typical length for a commercial message) the VCR will remain in the pause mode until 32 seconds after the last such blank frame. Quite a few prior art references disclose variations on this type of system, wherein the VCR is paused for a fixed period of time following detection of a blank frame in the video signal. For example, PCT Application No. WO81/00945 by Johnston and Koombes discloses a system of this type. Such systems are claimed to be relatively effective for eliminating commercial messages, but suffer certain drawbacks. In this regard, program material immediately following a commercial break is irretrievably lost since the VCR is held in the "pause" mode for a predetermined period of time (30 to 60 seconds or more) following each break in the television signal. Furthermore, additional program material may be irretrievably lost if the timing circuit is falsely triggered, such as by a fade between scenes in the program.

Other prior art systems have sought to overcome these drawbacks. For example, U.S. Patent No. 5,151,788 to Blum discloses a system for eliminating commercials from a video signal that performs real time analysis of the video signal immediately following a blank frame. If there is a high

level of "activity" in the signal immediately following a blank frame, a commercial message is presumed and the VCR is commanded to pause. On the other hand, if a low level of activity is detected, the preceding blank frame is presumed to be a fade and the VCR is commanded to resume recording. This approach solves the problem of losing a fixed amount of program material if a VCR pause is falsely triggered, but it is still susceptible to misclassification. If a program fade is immediately followed by an "active" scene, this will be misclassified as a commercial. On the other hand, a commercial with a low level of "activity" will be misclassified as program material.

A different approach to eliminating commercial messages is to automatically rewind a VCR to the beginning of a commercial message each time one is detected while recording a television program. One such system is disclosed in U.S. Patent No. 4,750,052, which issued on June 7, 1988 to Poppy and Samelson. A virtually identical system is disclosed in U.S. Patent No. 4,752,834, which issued on June 21, 1988 to Koombes. In both of these systems, fades (i.e., blank frames) in the video signal are detected and the time interval between successive fades is determined in a timing circuit. If the timing criteria for a commercial message are met, the VCR is rewound to the position of the fade associated with the beginning of the commercial message and the VCR is returned to the record mode. This process repeats for each commercial message that is detected. These systems permit an editing decision to be made after an entire commercial has been aired; however, as with the other systems previously described, program material is still irretrievably lost if there is a false detection of a commercial. Furthermore, the frequent rewinding of the tape during long commercial

4

breaks accelerates the wear of the VCR tape transport mechanism as well as the tape itself.

Yet a different approach is disclosed by Mizuki in Japanese patent document 58-146072, which was published on August 31, 1983. A similar system is disclosed in U.S. Patent No. 4,570,192, which issued on February 11, 1986 to Hori. In both of these systems, a video program is viewed by an operator as the program is recorded or is replayed. The operator places an electronic mark on the tape at the beginning and end of each commercial message or any other undesired recorded material. When the tape is subsequently replayed, either for viewing or transcription to another tape, the VCR is commanded to fast-forward through the portions of tape bounded by the applied marks. These systems rely entirely on human intelligence to classify the different portions of the video signal.

Still other systems are known that discriminate commercial messages based on characteristics of the transmitted video signal. A system of this type has been marketed in Japan by Mitsubishi under the name "Auto-Cut". In this system, the audio channel is monitored for the presence of a second audio program (SAP) and/or stereo modulation. Many of the programs that viewers wish to tape are broadcast in dual languages (e.g., Japanese and English) and/or with monaural sound. However, commercial messages in Japan are generally broadcast in stereo and in the Japanese language only. Thus, a VCR with the Auto-Cut system is able to record a monaural program or one with SAP and suspend recording during commercials. Other systems marketed in Japan operate on a similar principle, but record the entire program and then place the VCR in a fast scan mode during playback when stereo sound or the absence of SAP is detected.

All known prior art automatic commercial elimination systems rely on real-time signal analysis to classify the broadcast signal as program material or as a commercial message. This is true whether the classification is being performed during the recording or playback process. Prior art automatic systems do not examine detected events in the full context of  
5 surrounding events. Thus, misclassification is relatively common. When done during the recording process, such misclassification will cause portions of program material to be irretrievably lost.

### SUMMARY OF THE INVENTION

10

According to the present invention there is provided a video recording and playback system comprising:

- (a) a video recorder/player having a record mode, a play mode and a fast scan mode;
- 15 (b) a recording medium for insertion into the video recorder/player so as to record a video signal thereon in the record mode and play the video signal recorded thereon in the play mode, said video signal including program material of first and second categories;
- (c) event detection means for detecting events within the video signal;
- (d) means for marking the recording medium with a first type of mark in proximity  
20 to a respective event recorded on the recording medium;
- (e) a data memory for storing times of occurrence of the events detected in the record mode;
- (f) means for analyzing the events to classify segments of the video signal as containing program material of one of the first category and second category;
- 25 (g) means for positioning the recording medium to beginning and ending positions of each segment of the video signal classified as containing program material of the second category;
- (h) means for marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning  
30 positions and with a third type of mark in predetermined relationship to a corresponding first

CE 2



type of mark at each of said ending positions.

The invention also provides a video-recording method comprising the steps of:

- (a) recording a video signal on a recording medium;
- (b) monitoring the video signal as it is recorded to detect events therein;
- 5 (c) marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;
- (d) storing data representative of a time of occurrence of each event;
- (e) analyzing the data to classify segments of the video signal between events as one of a first and second category;
- 10 (f) positioning the recording medium to beginning and ending positions of each segment of the video signal classified as the second category;
- (g) marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions;
- (h) marking the recording medium with a third type of mark in predetermined
- 15 relationship to a corresponding first type of mark at each of said ending positions.

The invention also provides a method of processing a video signal recorded on a recording medium comprising the steps of:

- (a) replaying the recorded video signal to detect events therein;
- (b) marking the recording medium with a first type of mark in proximity to a
- 20 respective event recorded on the recording medium;
- (c) storing data representative of a time of occurrence of each event;
- (d) analyzing the data to classify segments of the video signal between events as one of a first and second category;
- (e) positioning the recording medium to beginning and ending positions of each
- 25 segment of the video signal classified as the second category;
- (f) marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions;
- (g) marking the recording medium with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

The invention also provides a video recording and playback system including:

(a) a video recorder/player having a record mode, a play mode and a fast scan mode said recorder/player having means to receive a recording medium whereby the recorder/player is operable to record a video signal on the recording medium in the record mode and play the video signal recorded on the recording medium in the play mode, said  
5 video signal including program material of first and second categories;

(b) event detection means for detecting events within the video signal;

(c) means for marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;

(d) a data memory for storing times of occurrence of the events detected in the  
10 record mode;

(e) means for analyzing the events to classify segments of the video signal as containing program material of one of the first category and second category;

(f) means for positioning the recording medium to beginning and ending positions of each segment of the video signal classified as containing program material of the second  
15 category;

(g) means for marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions and with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.



**BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a functional block diagram of a commercial elimination system according to the present invention.

Figure 2 is a functional schematic of the video event detector circuitry.

Figure 3 is a functional schematic of the audio event detector circuitry.

Figure 4 is a functional block diagram of an alternative embodiment of a commercial elimination system according to the present invention.

Figure 5 is a schematic diagram of the video signal integrator of Figure 4.

Figure 6 is a schematic diagram of the audio signal integrator of Figure 4.

Figure 7 is a functional flow diagram of the recording phase.

Figure 8 is a functional flow diagram of the recording phase in an alternative embodiment of the invention.

Figure 9 illustrates the operations performed in the tape marking phase.

Figure 10 is a functional flow diagram of the playback and over-ride phases.

Figure 11 illustrates over-writing the control track signal to place commercial elimination marks on the video tape.

Figure 12 illustrates the format of the sync mark.

Figure 13 illustrates the format of the "A" mark.

Figure 14 illustrates the format of the "B" mark.

### **DETAILED DESCRIPTION OF THE INVENTION**

In the following description, for purposes of explanation and not limitation, specific details are set forth in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices and circuits are omitted so as to not obscure the description of the present invention with unnecessary detail.

U.S. Patent No. 5,333,091 discloses a control unit that is coupled between a conventional VCR and a conventional television receiver/monitor. This "stand alone" control unit processes the video signal prior to being recorded to detect events within the signal and to modulate the recorded signal with a time code. The spacing and duration of the detected events is analyzed to classify the video signal between events as either program material or commercial message material. A map of the video signal is stored in the control unit. Upon playback of the recorded program, the map is retrieved and control signals are sent to the VCR to rapidly scan through the commercial messages as the program is replayed.

The subject of this disclosure is a system functionally similar to that disclosed in U.S. Patent No. 5,333,091, but which is preferably incorporated within a video recording device such as a VCR. Although a VCR is the

preferred recording mechanism, the invention is not limited in this regard and may be practiced with other video recording media such as magnetic discs or writable optical discs. Figure 1 is a partial block diagram of a video recording device 10 according to the present invention. For clarity, only those functions related to commercial elimination are shown. Of course, it will be recognized that certain functions may be housed in a unit that is physically separate from the VCR, if desired. For example, the event detection circuitry comprising functional blocks 102, 104, 106 and 108 and the commercial elimination microprocessor 114 with its associated memories 116, 118 could all be housed in a unit that is attached to the VCR by an interface cable or umbilical, or that is attached directly to a plug-in socket on the VCR. Such a configuration could be utilized to adapt a basic VCR chassis for use in different markets where differing broadcast protocols require specialized commercial detection processing.

Referring still to Figure 1, the "VIDEO IN" and "AUDIO IN" signals originate from the VCR tuner in a recording mode of operation or from the VCR playback heads in a playback mode of operation. These signals are applied at video and audio event detectors 102 and 104, respectively, which are more fully described below. The outputs of event detectors 102 and 104 are interrogated by commercial elimination microprocessor 114 to build an event list that will be processed by a commercial detection algorithm.

All commercial detection and elimination functions are controlled by microprocessor 114, which may comprise an 8-bit 8031 chip operating at 30 megaHertz. Associated with microprocessor 114 is random access memory (RAM) 116 for scratch pad storage and read only memory (ROM) 118, which stores the operating instructions for processor 114. Microprocessor 114 communicates extensively with VCR control microprocessor 120. With

/o

respect to commercial elimination functions, VCR control microprocessor 120 monitors the real time tape counter 122 and controls the operation of tape transport 124. In some embodiments, it may be advantageous to combine the functions of processors 114 and 120 into a single processor.

Nearly all of the functions of commercial elimination microprocessor 114 are automatically controlled. However, two user controls are provided. A MODE switch 126 allows the user to select a fully automatic commercial elimination mode, a manual mode or to disable all commercial elimination functions. A SKIP button 128 provides user control of the commercial skipping function when operating in the manual mode. Controls 126 and 128 may be placed on the front panel of device 10; however, they are preferably included on a remote control transmitter that provides user controls for all of the conventional VCR functions. Alternatively, the choice of operating mode may be effected through an on-screen menu rather than a dedicated control 126.

The commercial detection algorithm executed by microprocessor 114 identifies the location of commercial groups on a video tape. To implement the commercial elimination feature, the video tape is marked at the beginning and end of each commercial group. These markings are preferably written onto the control track of the video tape with control head 130. During the marking operation, the commercial identification markings are provided by control signal generator 132. When the video tape is replayed, the commercial identification markings are read by control signal decoder 134. Although marking of the control track is preferred, the present invention may also be practiced by applying the tape markings elsewhere, such as in the vertical blanking interval of the video signal, in which case the read/write functions can utilize the video play and record heads of the VCR.

//

As mentioned above, the "VIDEO IN" and "AUDIO IN" signals originate from the VCR playback heads in the playback mode of operation. During commercial skipping, it is desirable to mute both of these signals. For this purpose, the video signal is routed through video switch 136, which also receives the output of video generator 138. The latter circuit provides a constant video signal, such as a solid blue screen. Other types of video screens may be developed by video generator 138. An operator control may be provided to over-ride video switch 136 if it is desired to view the video signal as commercials are scanned past. Muting switch 140 mutes the audio output signal during fast scan, although this is a feature that is already implemented in most VCRs.

#### Video event detection

In one embodiment of the invention that is described in detail herein, video event detector 102 detects "black" frames in the video signal. A "black" frame is one in which there is essentially no video signal at all, such as is characteristic of frames immediately preceding and following commercial messages in television broadcasts of the major U.S. networks.

One embodiment of detector 102 is shown in greater detail in Figure 2. Detector 102 monitors the incoming video signal and provides a signal to the commercial elimination processor 114 whenever the video falls within black detect limits. Black frame detection includes the following elements:

- Signal clamping, for automatic level control
- Filtering to reduce effects of video noise
- Comparison to a threshold level
- An active area detection window

12

### Latched detection output

The detection of black video level is accomplished by comparing the video level to a precise threshold level in comparator 208. To be effective, this threshold is very near the black video level. Accurate control of the video signal is required to allow for correct detection with changing video signal levels. The input video signal is first amplified by amplifier 202 and then the video level is normalized through the use of a DC clamp circuit 204. This circuit is activated in the back porch area of each horizontal video line. A control pulse signal is generated in sync separator/timing circuit 106 that occurs from the trailing edge of the horizontal sync to the end of the video back porch. This signal drives clamping circuit 204 that sets a DC level in the video signal prior to detection.

There are many types of noise commonly present in video signals. The black detector preferably includes a low-pass filter 206 to provide filtering of fast, spurious luminance signals, characteristic of video "snow". This type of noise is very common and originates from poor video reception and other interference. By providing a high frequency bypass to ground, the effects of such noise are greatly reduced.

Once the video signal has been properly conditioned and filtered, it is compared against the fixed DC threshold level in comparator 208. Any video luminance excursion that exceeds this threshold will change the output state of the comparator. This function requires a relatively high speed signal comparator capable of responding to signal changes in the microsecond range.



Detector 102 is sensitive to video level excursions that exceed a preset level. To prevent false detection, the event detection window generator 108 provides a detection window that gates the detector within a rectangular portion of the viewable screen at window gate 210. Timing for generation of the detection window is provided from sync separator and timing circuit 106, which detects the horizontal and vertical synchronization pulses within the video signal and provides logic level timing signals for the video processing circuitry. Sync separator 106 may be constructed with discrete components using well known video circuits or may utilize a commercially available integrated circuit such as a Motorola MC 44145 device or equivalent.

The rectangular detection window excludes the start and end of the video frame, thereby eliminating video occurring during vertical blanking. The window also excludes the left and right edges of the picture to eliminate false detection due to video effects occurring in the horizontal sync areas of the picture. Some television scrambling systems will produce a video signal at the extreme edges of the picture, and this will be disregarded.

The output of the detection comparator 208 can be a fast pulse, necessitating that it be latched for sampling by the commercial elimination processor. A simple latch device 212 is provided that will capture any detection event occurring during the video frame. Once the state of the latch has been sampled by the commercial elimination processor it is cleared for the next video frame.

14

### Audio event detection

Pauses in television audio are also important indicators for commercial detection, especially when they occur simultaneously with the occurrence of video events such as black frames. The silent frame detector 104, shown in greater detail in Figure 3, monitors the incoming audio signal and provides an output when periods of silence are detected in the audio.

The audio detection circuitry contains the following elements:

- Summing of left and right audio channels (if stereo audio)

- Amplification of signal prior to detection

- Filtering

- Comparison to a threshold level

- Latching of detection output

The input audio signals from both stereo channels are buffered by circuits 302. For best response, both left and right audio signals are summed together prior to detection. This is easily accomplished using a summing node 304 and simple amplifier 306. The audio level is amplified so that detection of very low level audio is enhanced. An amplification factor of approximately 2 to 4 will provide adequate signal to the audio comparator 310. This amplification also provides AC coupling of the signal to present an audio level that can be easily referenced to ground. Filter 308 removes static and other high frequency noise.

The audio detection is accomplished by comparing the audio level to a fixed threshold level which is set so that any noticeable audio level will

15

exceed this threshold and change the output level of the comparator 310. The output of the level comparator 310 is held by latch 312 so that any fast audio excursion is captured for subsequent sampling by the commercial elimination processor. This sampling is typically accomplished every video frame, at the same time the black detector is sampled.

#### Digital event detection

Although it is conventional for television broadcasts within the United States to have black frames preceding and following commercial messages, such is not necessarily the case. Broadcasters could insert virtually any video signal during program breaks. For example, a blue screen could be used (as is the case in France). A constant video signal of this sort, which need not be black, is referred to herein as "flat", i.e., the video signal is essentially constant throughout the frame. To detect "flat frame" events, the video event detection may be implemented to declare an event if the video signal within a field or frame varies from an average value by a predetermined amount. Since black frames are a subset of flat frames, such a flat frame detector is equally capable of detecting black frames.

Frames immediately preceding and following commercial messages may not even be flat. For example, a broadcaster could insert a patterned screen or a solid screen superimposed with the broadcaster's logo. To handle these situations, video event detection may employ a scene change (or cut) detector which compares the video signal within a plurality of screen windows from frame to frame. When the average video signal within any one or more of the windows changes by a predetermined amount, a scene change is declared. If there are two scene changes within a predetermined

16

period of time (e.g., a change from program to a broadcaster logo screen followed by a change to a commercial message) an event is declared. The time interval for declaring an event of this type should be relatively short (on the order of five seconds or less) to minimize the number of false events detected. In some markets, such as Japan, the transition from program to commercial is an instantaneous cut. Detecting commercials in this environment also requires the ability to detect scene changes.

With reference to Figure 4, an alternative embodiment designated generally as device 10' is shown, in which any of the above-described event detection strategies can be selectively implemented. In this embodiment, the actual event detection is performed by software in microprocessor 114' based on digitized samples of the video signal from integrator 152. Processor 114' preferably includes a multiplexed analog-to-digital (A/D) converter. One such processor suitable for this application is the ST9296 from SGS, which has four analog inputs multiplexed to an 8-bit A/D converter. Alternatively, A/D conversion may be performed in a separate device external to the microprocessor.

Figure 5 illustrates the analog circuitry of integrator 152 for processing the video signal prior to digital sampling. The VIDEO IN signal is first level clamped as in the previously described embodiment. The clamped signal is then integrated by amplifier U1. The video signal is preferably integrated across each complete video line, although less frequent integration may be used as subsequently described. The output voltage of the integrator developed across capacitor C1 is asserted at one of the multiplexed A/D inputs of processor 114' where it is captured for conversion to an 8-bit binary value. The integrator is reset on command from processor 114' with a pulse that activates switch U2 to briefly short the integrator output to ground.

Processor 114' stores each of the binary values which represents the integrated luminance level of the respective video line. It should be noted that it may not be necessary to sample and store the luminance level of every video line. For example, sampling approximately 60 out of the 240 active lines in a video field may be sufficient to characterize the field.

With representative samples of the luminance levels of individual video lines, processor 114' detects the presence of video events. For flat field detection, samples within an entire video field are examined. The maximum and minimum luminance values are located and the difference is computed. This difference is then compared to a predetermined threshold. The field is declared to be "flat" if the difference is below the threshold.

As already mentioned, black fields (or black frames) are a subset of flat fields. To detect a purely black frame, the absolute luminance level of a flat field is tested to determine if it is below a predetermined threshold level. Black frame detection may be enhanced by use of a positive slope analog integrator that integrates the video signal over an entire video field. Such integrator operates in parallel with the digital event detection, and the integrated video signal is converted to a digital value at the end of the video field. Use of the integrated video signal in this fashion helps to discriminate against low luminance scenes within a regular television program.

Scene change or "cut" detection is also made possible with device 10'. Luminance levels of a video frame are compared to corresponding luminance levels of the following video frame. If a sufficient number of lines exhibit a change in luminance exceeding a predetermined threshold, then a scene change is declared. While it is possible to compare each video line for which a luminance value is determined with the corresponding line of the

/ 8

next frame, efficiency is increased if comparisons are made between corresponding horizontal bands of multiple lines. For example, the screen may be divided into 15 horizontal bands and the luminance levels of lines within each band averaged. The average luminance of each band is then compared to the corresponding value of the following frame.

Referring now also to Figure 6, an audio signal integrator 154 is illustrated. This is implemented in substantially the same way as video signal integrator 152 although the specific components differ due to the different nature of the signal. The AUDIO IN signal in Figure 6 is the sum of the left and right channels as in the case of the previously described embodiment. The integrated audio signal voltage developed across capacitor C2 is asserted at a second one of the multiplexed A/D inputs of processor 114'. It should be noted that the audio signal may be sampled at a much slower rate than the video signal, perhaps only once per video frame, in which case silent frame detection involves a simple threshold comparison.

It will be observed that there is no functional unit in device 10' corresponding to the event detection window generator 108 of device 10. As should be apparent, the window function can be readily performed by software in processor 114' which receives the video sync signals as interrupts.

### Operational Description

The operating modes of devices 10 and 10' are basically similar to a conventional VCR. Recording and playback of video is accomplished in the same manner as on any other VCR. However, when the commercial

elimination feature is enabled, device 10/10' performs additional functions during the various VCR operating modes. Most of these additional functions do not require interaction with the user.

By use of the MODE switch, the user may select between two basic operating modes - manual and automatic. This selection affects the handling of the video tape during the playback phase of device 10/10' as described below. All of the other operating phases of device 10/10' are identical in both manual and automatic modes.

The commercial elimination functions of device 10/10' can best be understood in terms of the various operating phases, each of which is described below.

### Recording phase

Figure 7 shows the operations that are performed in the recording phase. This phase is active whenever the VCR is in record mode (either from key entry, or from timer operation), and the commercial elimination feature is enabled. From the user's perspective, video programs are recorded as on any standard VCR. However, as indicated in Figure 7, the device is transparently performing other functions while recording is in progress.

During the recording phase, the event detectors are sampled and the tape location of each event, obtained from the real-time tape counter, is stored in an event list in temporary memory. For purposes of commercial detection processing, an "event" is determined in accordance with the particular broadcast protocol of the program being recorded. As previously

20

discussed, black video frames are events of interest in many TV markets, particularly North America. In other markets, such as Japan, video cuts are events of interest. In this description, North American broadcasting conventions are presumed. However, it will be recognized that device 10/10' is operable in other markets with suitable modifications.

As events are detected, the video tape is marked in real time with a "sync" mark at the location of each detected event. The sync mark, the format of which is more fully described below, starts at the beginning of the event and has a duration of four video fields. The purpose of the sync marks is to precisely indicate the possible start and end points of a commercial group. Since the sync marks are written onto the tape prior to the event analysis which classifies the program segments between events as program or commercial, the sync marks by themselves do not indicate the presence of a commercial group. During the subsequent processing and marking phases, the positions of the commercial groups will be determined and indicated by writing different marks on the tape.

The sync marks facilitate precise switching between the normal play and fast scan modes and thereby provides the best viewing experience in the playback phase. However, the use of sync marks is not essential to the operation of device 10/10'. Without sync marks, the marks identifying the beginning and ending of a commercial group may be written on the tape with reference to the real-time tape counter.

The recording phase is normally terminated whenever the VCR stops recording (whether by manual action, end of tape, timer or other function). After recording, the commercial elimination processor enters the processing phase (described below). If the recording session is less than a



21

predetermined minimum length, say 15 minutes, the stored events may be erased, and the processing phase may be bypassed. At any time during the recording phase the user can disable the commercial elimination feature by setting the MODE switch to OFF. This has the effect of canceling all data stored for the current session and prevents operation of the commercial elimination processing phase.

Application of the sync marks to the control track is ordinarily done at the time a video program is recorded. However, it may be desired to mark a tape that has been previously recorded on a different VCR which lacks the commercial elimination functions of the present invention. In such case, a modified recording phase is implemented in which the previously recorded video tape is "played" while event detection and sync marking proceeds in the manner described above. Subsequent processing and marking is then accomplished in the same manner as for a newly recorded tape so that the tape may thereafter be played with commercial elimination enabled.

#### Processing phase

This phase is active for a short time following the recording phase. Its purpose is to analyze the event list and determine when commercial groups occurred. This process involves applying a commercial elimination algorithm (described below) that analyzes the event list and identifies the occurrence of television commercial groups. The algorithm produces a commercial group list that includes the start and stop point of each commercial group identified within the recording session. This list of commercial groups is used during the tape marking phase to indicate the commercial groups on the video tape. Since the location of individual

22

events is no longer needed, the event data in memory may be erased or overwritten after completion of the processing phase.

Figure 8 illustrates an alternative embodiment, one that is particularly useful if the size of RAM 116 is limited. In this embodiment, the processing phase is integrated with the recording phase so that processing is performed "on-the-fly". The event list is processed continuously with a sliding window having a width of approximately two minutes or as necessary to accommodate the decision rules discussed below. The event list can thus be organized as a first-in-first-out file requiring only a modest amount of RAM since relatively few events occur within a two minute period. Such "on-the-fly" processing is particularly advantageous when cut detection is utilized to identify events. In this case, there is a relatively large number of events which would require a sizable memory to store the event list for an entire recording session.

#### Tape marking phase

Figure 9 diagrammatically illustrates the tape marking phase operations. After the processing phase is complete, the commercial group list in memory indicates the start and end points of the commercial groups that were identified within the recording session. In the marking phase, the VCR is rewound to the approximate beginning of the first commercial group. The tape is then marked by writing signals on the control track to identify the start and end of each commercial group. Each start and end mark is associated with a corresponding sync mark as more fully explained below. The real-time tape counter is used throughout the marking phase to indicate the current tape position to the commercial elimination processor. This is

compared to the values stored in the commercial group list to control the tape transport and marking operations. Since the sync marks are written on the control track during the recording phase, their position is always accurate with respect to the recorded video signal. In performing the marking operation, the VCR can use the position of the sync marks to correct the real-time tape counter for any accumulated error. After the entire recording session has been marked (which may take a few minutes), the tape is left positioned at the end of the recording. The VCR returns to standby mode of either Stop or Off (if in Program Timer mode). Upon successful completion of the tape marking phase, the commercial group list in memory may be deleted.

If no commercial groups were detected in the session, the marking phase is not executed, and the VCR returns to normal operation. During the marking phase, the VCR operation can be stopped by the user selecting OFF with the MODE switch, or by pressing STOP on the VCR. This will have the effect of canceling all commercial elimination operational phases, and returns the VCR to Stop mode at its current position. Subsequent selection of MANUAL or AUTO with the MODE switch will not restart commercial elimination operations until the next recording or playback session.

Each commercial group is marked with unique marks at the start (called the "A" mark) and end (called the "B" mark) of the group. This allows device 10/10' to differentiate the marks, and determine if the tape is entering or leaving a commercial group. The location of each B mark is advanced ahead of the actual event, to allow time for the VCR to brake and enter the normal Play mode when quickly skipping through a commercial group.

In performing the marking operation, it is important to consider the effect of transport mode changes. Depending on the configuration of the tape transport, errors may occur in the real-time counter when the transport is changed between play, stop, rewind and fast forward modes. Such errors are most likely to occur when changing from an "on-head" mode to an "off-head" mode or vice versa. If the magnitude of these errors is significant, marking should be accomplished using only "on-head" transport modes (e.g., forward and reverse scan) to reduce the cumulative effect of real-time counter errors.

#### Playback phase

Figure 10 illustrates the operations performed during the playback phase. When the VCR is placed into Play mode, and the commercial elimination feature is enabled, the commercial elimination processor samples signals from the tape control track, looking for the marks that indicate the start and end of each commercial group. In the automatic operating mode, the VCR performs the following actions upon detection of an "A" mark at the start of each commercial group:

- the VCR outputs a blue screen (unless blue screen feature is disabled);

- the audio outputs are muted; and

- the tape is advanced at fast forward or forward scan speed.

When the VCR is skipping and a "B" mark is detected at the end of a commercial group, the VCR performs the following actions:

25

the tape is returned to normal Play mode;

the video signal is monitored for the sync mark at the end of the commercial group;

when the sync mark is detected (or after a 2-second time-out if the sync mark is not detected), the blue screen video is disabled and the audio outputs are enabled.

In manual operating mode, no automatic action is taken at the start of a commercial group. During playback in the manual mode of operation, device 10/10' functions like a conventional VCR, except that the user has the option to view or skip commercials. The recorded video signal, including commercials, is played back at normal speed. However, at any time the user can press the SKIP button, which causes device 10/10' to immediately generate a blue video screen, mute the audio, and forward scan to the start of the next program segment, thereby skipping over the current or next commercial group. Note that the VCR will start skipping to the end of the next commercial group as soon as the SKIP button is pressed (regardless of whether the VCR is currently in a commercial or television program segment). The skipping process will automatically stop at the end of the next commercial group.

In order to improve the effectiveness of commercial elimination, it may be desirable to bypass automatic fast scanning of certain commercial groups. In particular, commercial groups at the beginning and ending of a recorded program often contain promotional messages, teasers, program lead-ins/lead-outs and other material that many viewers wish to see. Such materials are often interspersed with commercials and may be classified as such by the commercial detection algorithm. Accordingly, it may be

desirable to refrain from automatically fast scanning through commercial groups at the beginning and ending of a recording session. Such groups would nevertheless be marked in the manner previously described and could therefore be scanned through upon actuation of the SKIP button. To obtain the full benefit of this feature, it is preferable that each program which the user desires to record be made the subject of a separate recording session. Thus, even if two programs which the user desires to record are aired back to back, VCR timer commands should be separately entered for each program. Otherwise, lead-ins and lead-outs between the two programs may be automatically scanned through.

#### Over-ride operation

During the playback phase, the user may wish to stop the commercial skipping process. This can be accomplished in two ways. The user can disable commercial elimination entirely by selecting OFF with the MODE switch. This will cause the VCR to play the tape as would a conventional VCR. No further commercial elimination actions are taken until reenabled by the MODE switch.

Alternatively, the user can temporarily over-ride commercial elimination while the VCR is skipping a commercial group as shown at block 520 in Figure 10. This may be conveniently accomplished by pressing Play on the remote control or front panel of the VCR. If the VCR is currently skipping a commercial group, the reception of the Play command will cause the VCR to immediately resume normal play mode and cancel blue screen and audio muting. This feature allows the user to temporarily stop the

commercial elimination operation if the user wishes to view the commercial. This feature can also be used in the event that a commercial group is falsely detected during program material. Alternatively, the user can simply press the stop button to stop the VCR.

Over-ride operation does not change the current operating mode and does not disable commercial elimination functions except within the commercial group being skipped at the time of the over-ride. After an over-ride, the VCR will again skip the next commercial group if the automatic mode is selected. Commercial elimination can only be permanently disabled by setting the MODE switch to OFF.

Once a commercial group is over-ridden, device 10/10' will no longer attempt to skip that commercial group while in the automatic mode unless the tape is positioned at least three minutes ahead of the start of the group. This allows the user to back up and view a skipped video segment (which may have been falsely marked as commercial) without the playback phase attempting to skip that video segment again. This will occur when the tape is rewound to any position less than three minutes before the start of the group. However, for playback that occurs more than three minutes from the start of the over-ridden commercial group, device 10/10' will perform the normal commercial skipping process.

### Commercial Detection Algorithm

The commercial detection algorithm detects the presence and location of commercial groups within a television program. The algorithm processes data obtained during a recording session in the form of an "event list". The event list is stored temporarily in RAM memory until it is processed, either during or at the end of the recording session. The list contains entries for each occurrence of an event. In the described embodiment designed for the North American television market, the detectors respond to "black" and silent video frames, and an event is declared if both conditions occur simultaneously.

By analyzing these events, and the timing relationships between them, the detection algorithm is able to determine the probable locations of commercial groups within the recorded session. The result of this analysis is a commercial group list, which indicates where the commercial groups start and end on the video tape.

Each event in the event list contains the value of the real-time tape counter at the beginning of the event. The detection algorithm determines the interval between events, measured in video frames. By applying a set of logical rules, the algorithm determines if the segment defined between two events is a commercial or a program segment. The algorithm takes each event and processes all subsequent events that occur within a time window established by the decision rules. For each of these subsequent events, the time differential  $dt$  is calculated and the following decision rules are implemented:



29

1. Is dt less than or equal to 33.99 seconds?
2. Is dt less than 48.99 seconds and greater than 43.0 seconds?
3. Is dt less than 63.99 seconds and greater than 58.0 seconds?

If there is an affirmative response to any one of the decision rules, the corresponding segment following the event being examined is considered to be a commercial. The foregoing decision rules have been optimized for maximizing the commercial detection rate and minimizing the program (i.e., false commercial detection) error rate for North American television broadcasting. Different decision rules may be required in other television markets.

It will be recognized that the above-stated decision rules may be supplemented with additional rules to enhance the accuracy of commercial detection. Efforts are ongoing to determine an optimum rule set. At the cost of greater complexity, the rules may be adaptively changed for the particular recording environment. For example, different rules may be invoked as functions of the time of day, broadcast channel, etc.

After analyzing the event list data, the algorithm has determined the suspected locations of individual commercials within the recorded session. The next step is to combine these individual commercials into groups of commercials. Commercial groups consist of two or more individual commercials - it is presumed that a single commercial will not be broadcast in isolation. By calculating the start and end times of each commercial group, the algorithm generates a commercial group list, which is also stored

in RAM memory. A group is saved only if the total duration of the group is greater than 55 seconds.

Once the commercial group list is completed, or more frequently if on-the-fly processing is used, the event list can be erased from RAM memory since it is no longer needed. As described above, the commercial group list is used during the marking phase to control the placement of the start and end commercial group tape marks. Upon completion of the marking phase, the commercial groups can also be erased from RAM memory since the video tape is now permanently marked with the locations of each commercial group.

#### Control Track Marking

The device of the present invention applies the commercial elimination "A" and "B" marks to the control (CTL) track of the video tape. The hardware required to support this marking feature already exists in most VCRs. The "A" and "B" marks modify the duty cycle of the synchronization signal written onto the control track at the time the program was recorded. Many VCRs currently implement a similar feature for placing index marks on the tape. The preferred technique utilized with the present invention for applying marks to the video tape is similar to the one described by Hori in U.S. Patent No. 4,570,192.

Referring to Figure 11, the video tape control track signal, as defined in the published standards for the VHS format, consists of a periodic signal in synchronization with the video frame timing. The signal is recorded with a rectangular wave format, and read back from the tape as a differentiated

pulse train. The pulses indicate the rising and falling edges of the control track pulse signal. For video tape synchronization (tracking), the rising edge of the signal (positive playback pulse) is used to control the tape motor servos; the falling edge (negative playback pulse) is ignored. Therefore, as long as the rising edges of the control track signal are not disturbed, the duty cycle of the control track signal can be altered without affecting the operation of the video servo system.

When overwriting the control track with "A" and "B" marks, the VCR detects the control track signal and waits until just after the rising edge is detected before enabling control track record current. After the rising edge is detected, the write current is enabled and the timing of the duty cycle measured to control the polarity of the applied signal. The head write current is disabled before the actual end of the pulse in order to prevent overwriting the next rising edge of the control track pulse.

In order to improve compatibility with various VCR models, and to reduce noise associated with fast rise time signals, the leading edge of the overwrite wave form is preferably ramped. This improves readability when transferring a video tape between machines, that may have different head alignments or track widths.

Three types of marks are applied to the video tape: sync marks, A marks and B marks. These are designed to be compatible with VHS standard indexing marks. Each of the three types of marks is unique so that the VCR can readily distinguish between the beginning and ending of a commercial group. The marks comprise a sequence of video fields in which the control track signal is altered to have a duty cycle of either 27.5% or 60%.

The formats of the control track marks are illustrated in Figures 12-14. Figure 12 shows the sync mark, which is generated by device 10/10' during the recording phase of operation to mark the locations of detected events. For operation in North America where one or more black frames is a reliable indicator of a program transition, a sync mark is written upon simultaneous detection of a black frame event and a silent frame event. The sync mark consists of 4 cycles of the control track signal with a 27.5% duty cycle. The time between the beginning of the detected event and the beginning of the sync mark preferable does not exceed 500 msec.

The A mark, which denotes the beginning of a commercial group, is shown in Figure 13. This mark is written over a corresponding sync mark that was generated during the recording phase. During the marking phase, when the sync mark associated with the calculated start of a commercial group is detected, the control track is overwritten with the A mark. At the same time, the VCR tape counter is corrected for any error. If a sync mark is not detected within  $\pm 2$  seconds of its expected position, the A mark is nevertheless written, but the VCR tape counter is not updated.

The length of the A mark is preferably related to the length of the commercial group that follows. This allows the option, in the playback phase, of placing the VCR in its off-head fast forward mode to scan past a long commercial group. In most VCR transports, the off-head fast forward speed is significantly faster than the on-head forward scan speed. In an exemplary embodiment, the A mark has 8 cycles at a 27.5% duty cycle if the commercial group has a playing time of three minutes or less and has 12 cycles at 27.5% duty if the commercial group is longer than three minutes. Of course, these numbers are somewhat arbitrary and other values can be used if desired. The decision of whether or not to go off-head depends on

the characteristics of the tape transport mechanism and involves a trade-off between the time required to unload the head and the time saved by moving the tape at the higher fast forward speed. With some transport mechanisms, it may be more efficient to always remain on-head.

Figure 14 illustrates the format of the B mark, which is written near the end of each commercial group. This mark is written substantially before the sync pulse corresponding to the actual end of the commercial group so that the tape transport will have sufficient time to return to the normal play speed at the end of a commercial skipping operation and reestablish tracking, if necessary. The B mark preferably consists of 24-29 cycles at 27.5% duty cycle and ends at a fixed period of time before the ending point of the commercial group. In an exemplary embodiment, the B mark ends 50 seconds of playtime before the sync mark to accommodate a relatively high fast scan speed. It is preferred that the formats of the tape markings be consistent in all devices built according to the invention so that video tapes recorded on any one such device can be replayed on another with identical commercial elimination functionality.

It is possible that A and B marks may be written over previously written sync marks. To insure that the marks do not appear to be extended as a result of such overwriting, each of the marks preferably includes at least two cycles of 60% duty factor at the leading and trailing edges of the mark so that the mark is clearly delineated.

In accordance with VHS standards, indexing marks may also be encoded on the control track using a variable duty cycle. Index marks are typically recorded on the video tape at the start of a recording, or they can be manually written or erased in some VCR models. The VHS index mark

consists of a solid pattern, e.g., 64 cycles, of 27.5% duty cycle pulses. In order to insure reliable detection of an index mark without interference by commercial elimination marks, the VCR control software should require at least 32 successive control track cycles at the 27.5% duty cycle for identification of an index mark. Requiring 32 cycles for index mark detection allows the VCR to differentiate between the commercial elimination marks (which are all shorter than 32 cycles) and normal index marks.

The marking operation, briefly described above in connection with Figure 10, is accomplished with the following steps:

1. Rewind to a position before the start of the first commercial group in the recording session.
- 2(a). Play until 2 seconds prior to start of the commercial group.
- 2(b). Detect sync mark (or time-out after 2 seconds if sync mark not found).
- 2(c). Correct for error in real-time tape counter.
- 2(d). Overwrite control track with "A" mark.
- 2(e). Begin fast forward or scan toward the end of the group.
- 2(f). Enter play mode 55 seconds (or as far in advance as required) prior to the end of the group.
- 2(g). Overwrite control track with "B" mark.
- 2(h). Advance to the start of next commercial group.
3. Repeat 2(a)-(h) above for all commercial groups.
4. Fast forward to end of recording session and stop.

35

Information decoding

It will be recognized that the video event detection capability of device 10/10' has the inherent capability for decoding information modulated on the video signal. Individual video frames can be modulated as black or non-black to provide a simple binary coding scheme. Although this affords a relatively low data rate, it can be an effective way to transmit data to device 10/10' if only black frame detection is provided. One application for such data communication is the transmission of time-of-day information so that the built-in clock of device 10/10' will always have the correct time. Inexpensive television broadcast time is often available in early morning hours. Such time can be advantageously utilized to transmit information to all receiving devices. The devices can be preprogrammed to scan for information at certain times of the day when normal use of the device is unlikely. Thus, for example, the device may enter a scan mode at 3 a.m. to search for a data header encoded with black frames. When the header is located, the data which follows is decoded and stored in processor 114. Aside from time-of-day, the coded information may include, for example, new operating instructions for processor 114. In this way, the commercial elimination algorithm can be periodically and automatically updated.

It should be apparent that the data communication bandwidth can be substantially higher in device 10' since up to each video line can be sampled. If all video lines are utilized to encode individual data bits, the communication bandwidth increases to 15.7 kHz.

It will be recognized that the above described invention may be embodied in other specific forms without departing from the spirit or essential characteristics of the disclosure. Thus, it is understood that the invention is

- 36 -

not to be limited by the foregoing illustrative details, but rather is to be defined by the appended claims.

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will  
5 be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

W  
CE



**CLAIMS****WHAT IS CLAIMED IS:**

- 1. A video recording and playback system comprising:**
  - (a) a video recorder/player having a record mode, a play mode and a fast scan mode;**
  - (b) a recording medium for insertion into the video recorder/player so as to record a video signal thereon in the record mode and play the video signal recorded thereon in the play mode, said video signal including program material of first and second categories;**
  - (c) event detection means for detecting events within the video signal;**
  - (d) means for marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;**
  - (e) a data memory for storing times of occurrence of the events detected in the record mode;**
  - (f) means for analyzing the events to classify segments of the video signal as containing program material of one of the first category and second category;**
  - (g) means for positioning the recording medium to beginning and ending positions of each segment of the video signal classified as containing program material of the second category;**
  - (h) means for marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at**

- 38 -

each of said beginning positions and with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

2. The system of claim 1 further comprising:

5 mark detection means for detecting the second and third types of marks;

control means for causing the video recorder/player to enter the fast scan mode when the second type of mark is detected and for causing the video recorder/player to enter the play mode when the third type of mark is detected.

10 3. The system of claim 1 wherein the means for marking the recording medium with the first type of mark comprises a recording head for a video sync control signal.

4. The system of claim 1 wherein the means for marking the recording medium with the second and third type of mark comprises a recording head for a video sync control  
15 signal.

5. The system of claim 1 wherein the recording medium is a video tape.



6. The system of claim 1 wherein the recording medium is a magnetic disk.

7. The system of claim 1 wherein the recording medium is an optical disk.

8. A video-recording method comprising the steps of:
- (a) recording a video signal on a recording medium;
  - (b) monitoring the video signal as it is recorded to detect events therein;
  - (c) marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;
  - (d) storing data representative of a time of occurrence of each event;
  - (e) analyzing the data to classify segments of the video signal between events as one of a first and second category;
  - (f) positioning the recording medium to beginning and ending positions of each segment of the video signal classified as the second category;
  - (g) marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions;
  - (h) marking the recording medium with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

40

9. The method of claim 8 wherein the recording medium is a video tape.
10. The method of claim 8 wherein the recording medium is a magnetic disk.
11. The method of claim 8 wherein the recording medium is an optical disk.
12. The method of claim 8 wherein the first type of mark is recorded on a video sync control track.
13. The method of claim 8 wherein the second and third types of mark are recorded on a video sync control track.
14. The method of claim 8 further comprising the steps of:
  - replaying the recorded video signal;
  - playing the segments of the video signal classified as the first category at normal speed; and
  - rapidly scanning through the segments of the video signal classified as the second category.

41

15. A method of processing a video signal recorded on a recording medium comprising the steps of:

- (a) replaying the recorded video signal to detect events therein;
- (b) marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;
- (c) storing data representative of a time of occurrence of each event;
- (d) analyzing the data to classify segments of the video signal between events as one of a first and second category;
- (e) positioning the recording medium to beginning and ending positions of each segment of the video signal classified as the second category;
- (f) marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions;
- (g) marking the recording medium with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

16. A video recording and playback system including:

- (a) a video recorder/player having a record mode, a play mode and a fast scan mode said recorder/player having means to receive a recording medium whereby the recorder/player is operable to record a video signal on the recording medium in the record mode and play the video signal recorded on the recording medium in the play mode, said video signal including program material of first and second categories;
- (b) event detection means for detecting events within the video signal;
- (c) means for marking the recording medium with a first type of mark in proximity to a respective event recorded on the recording medium;
- (d) a data memory for storing times of occurrence of the events detected in the record mode;
- (e) means for analyzing the events to classify segments of the video signal as containing program material of one of the first category and second category;
- (f) means for positioning the recording medium to beginning and ending positions of each segment of the video signal classified as containing program material of the second category;
- (g) means for marking the recording medium with a second type of mark in predetermined relationship to a corresponding first type of mark at each of said beginning positions and with a third type of mark in predetermined relationship to a corresponding first type of mark at each of said ending positions.

17. A video recording and playback system substantially as hereinbefore described with reference to the accompanying drawings.

18. A video-recording method substantially as hereinbefore described with reference to the accompanying drawings.

DATED this 28th day of May, 1998

ARTHUR D. LITTLE ENTERPRISES, INC.

By its Patent Attorneys

Davies Collison Cave

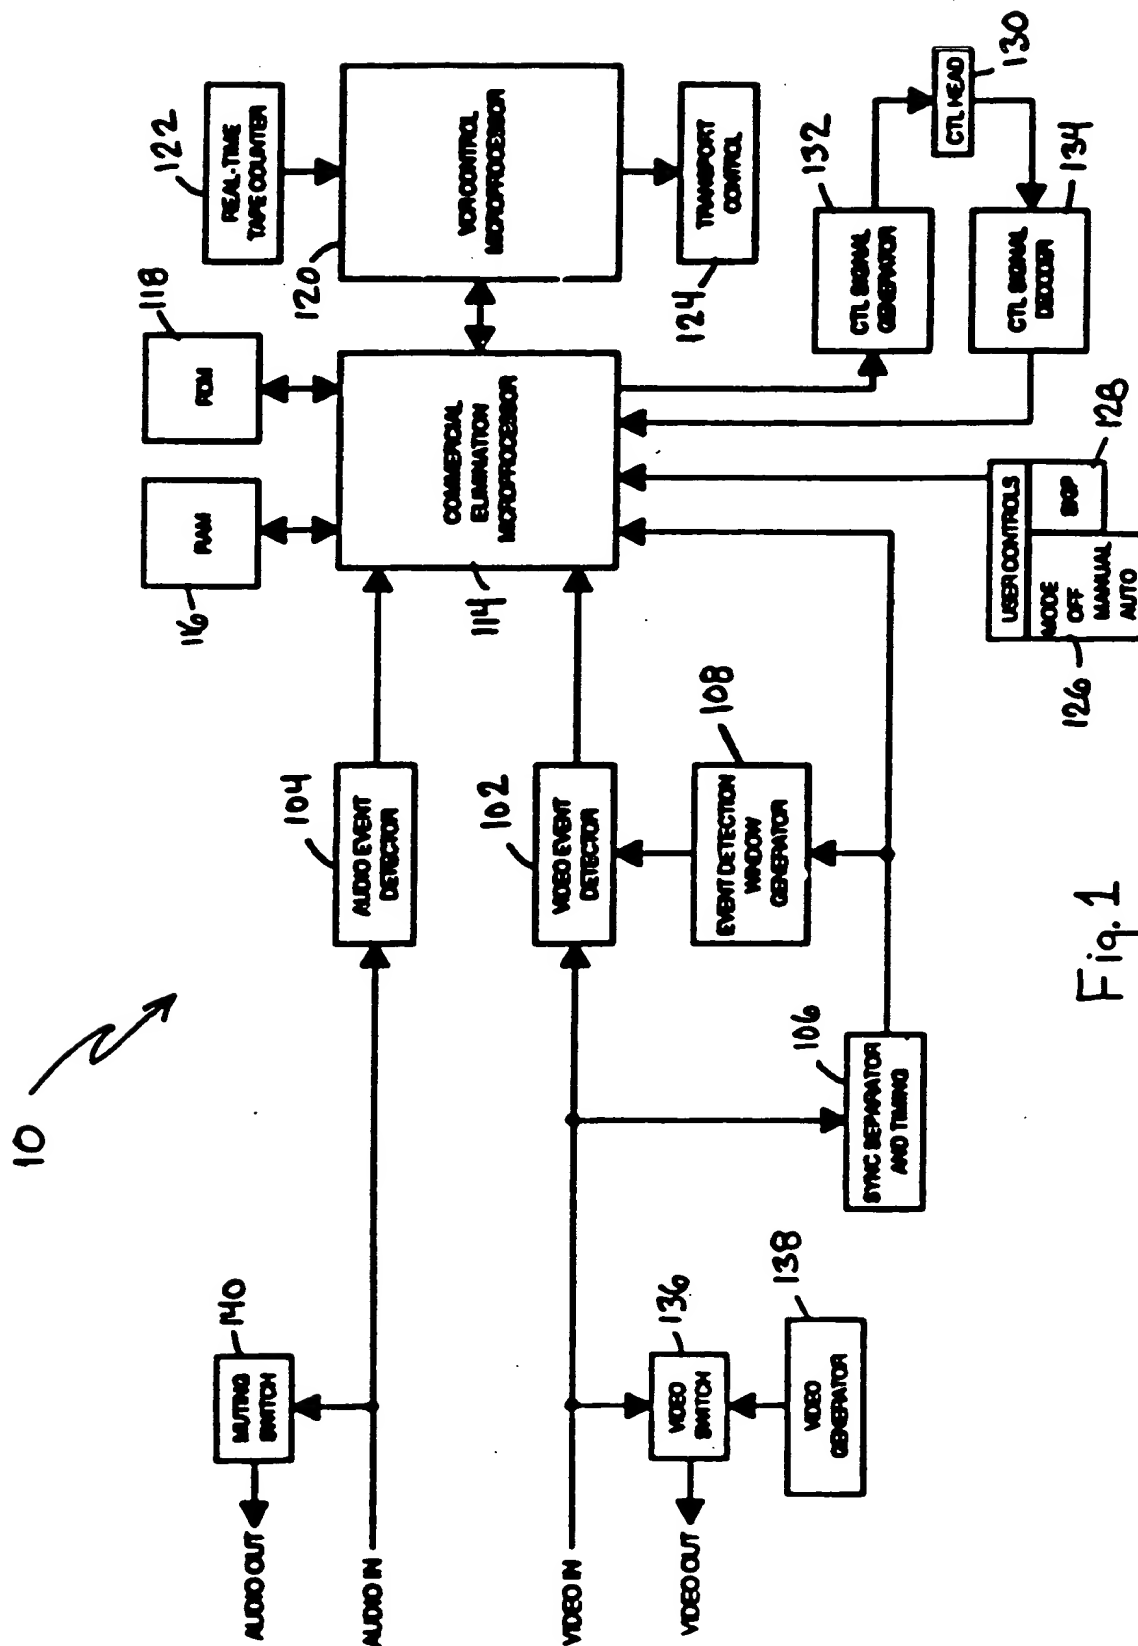


Fig. 1

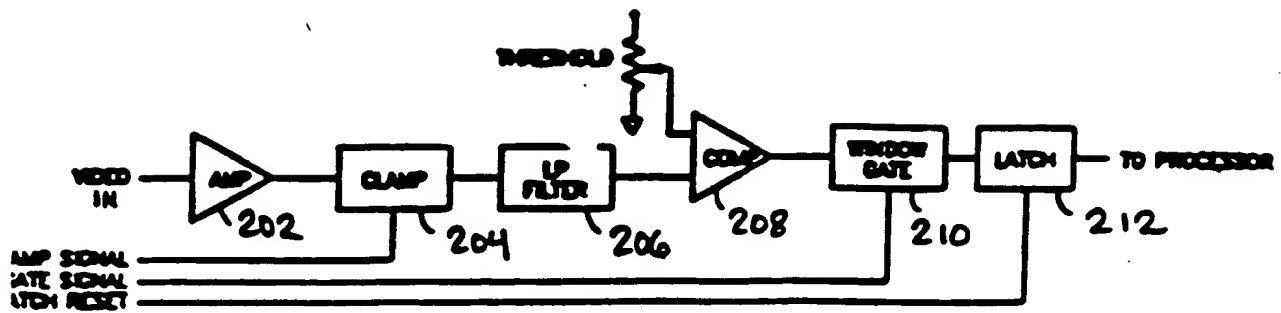


Fig. 2

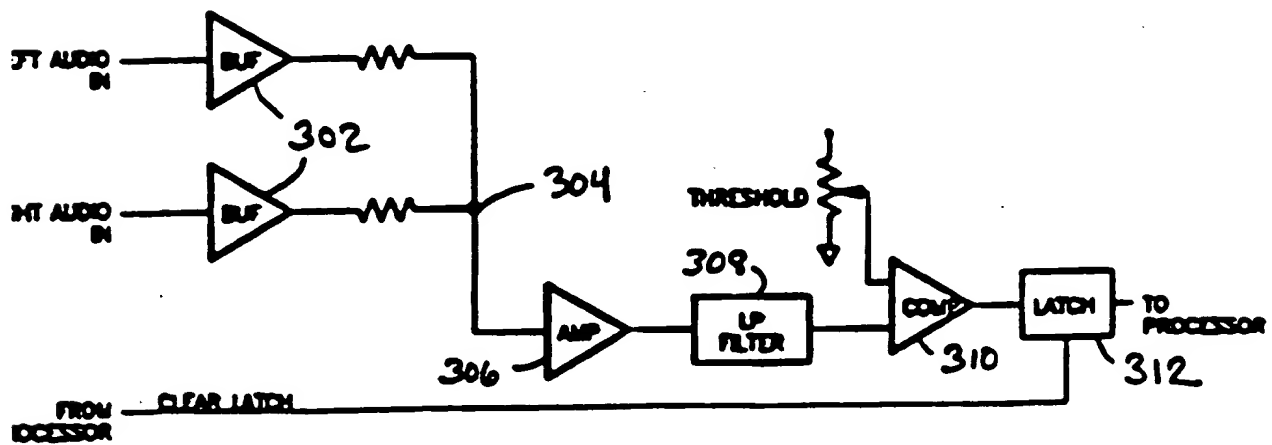


Fig. 3



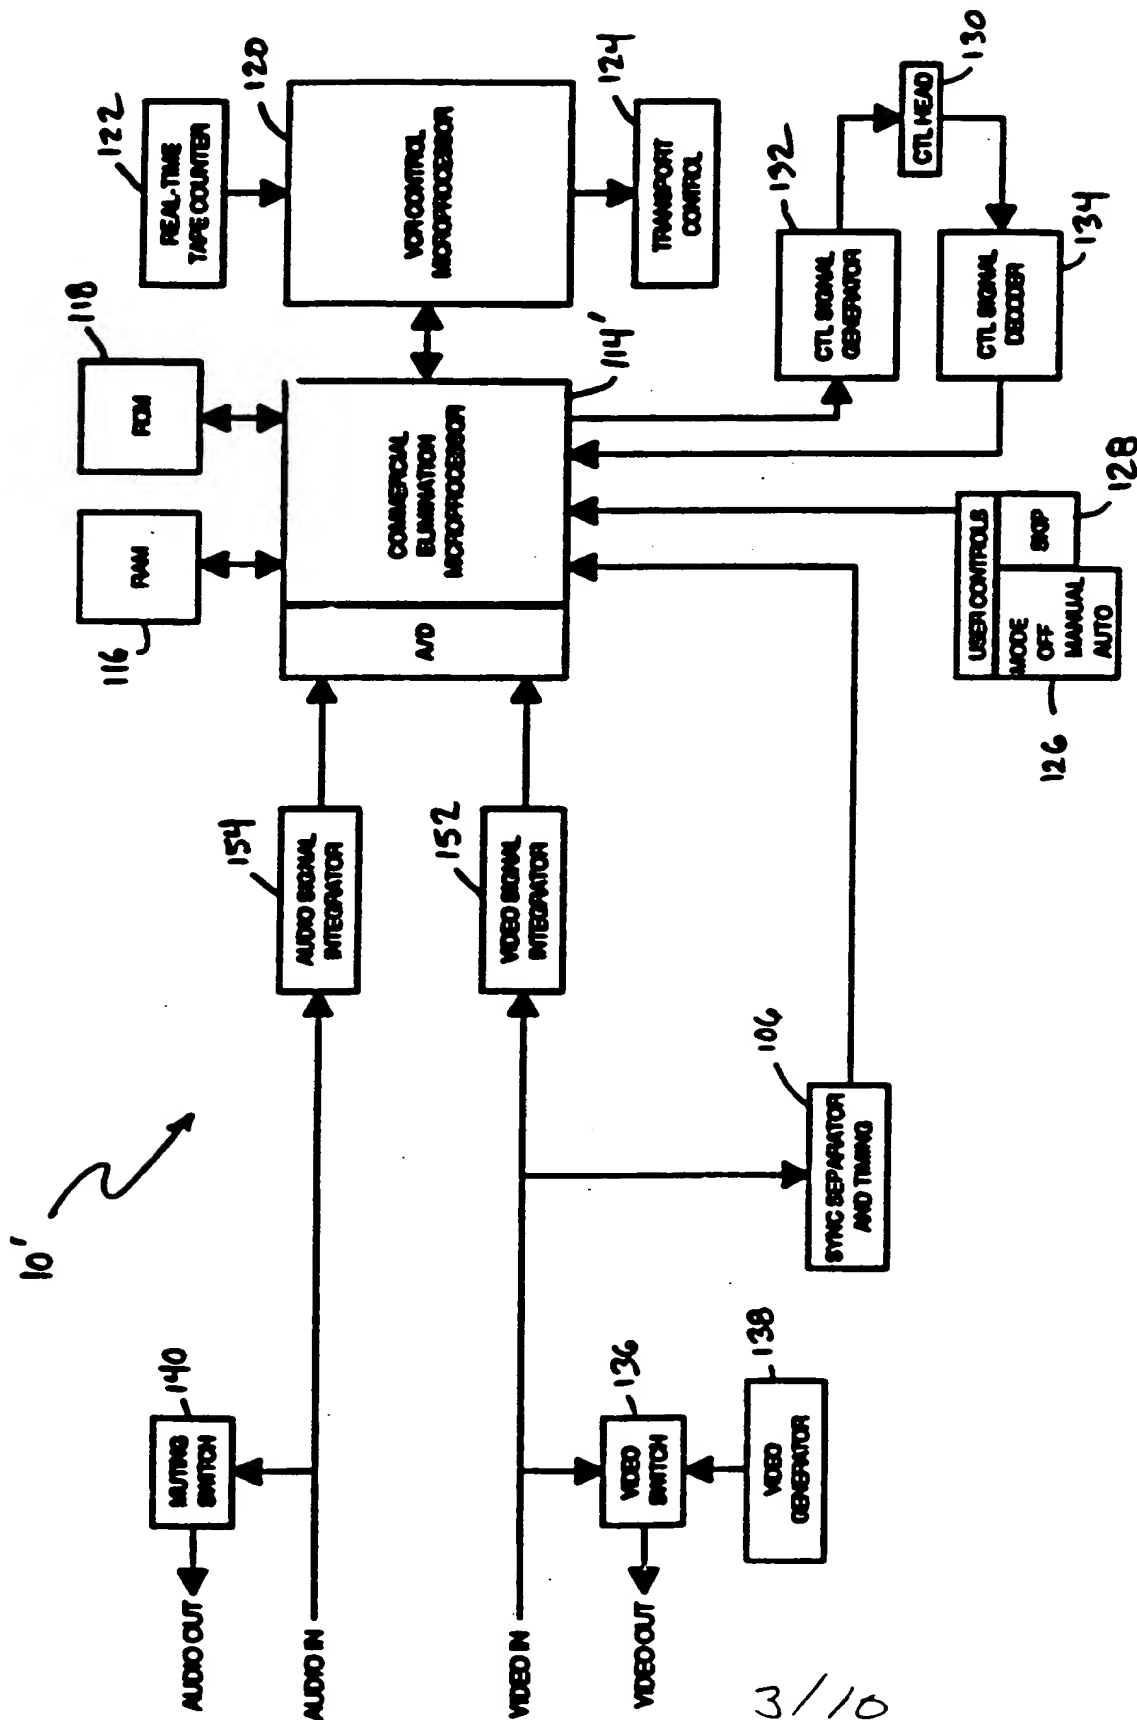


Fig. 4

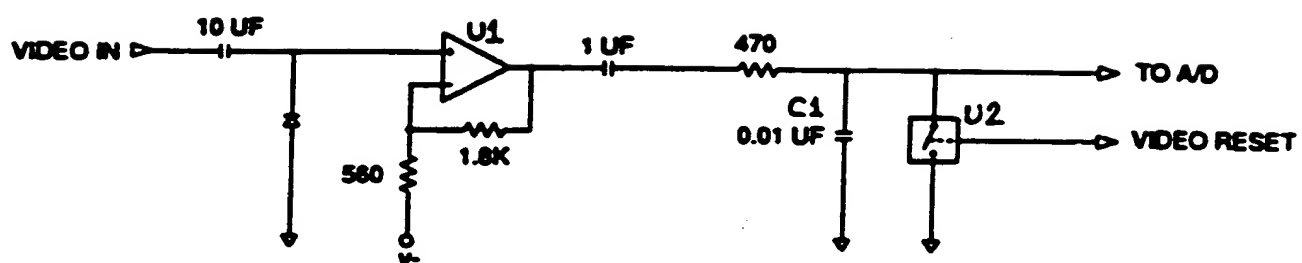


Fig. 5

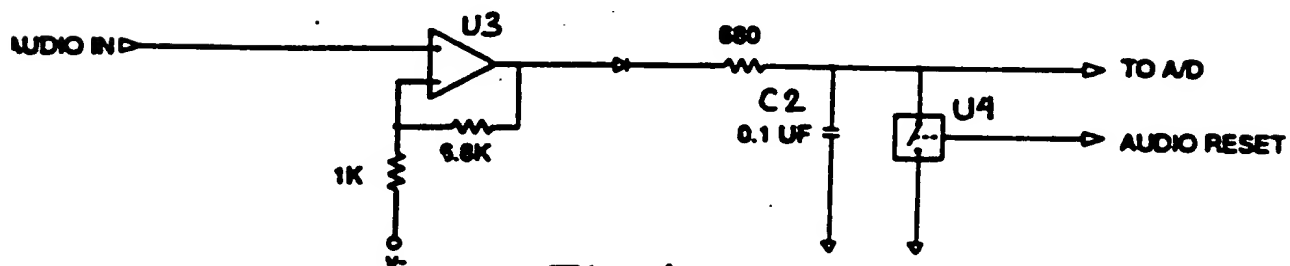


Fig. 6

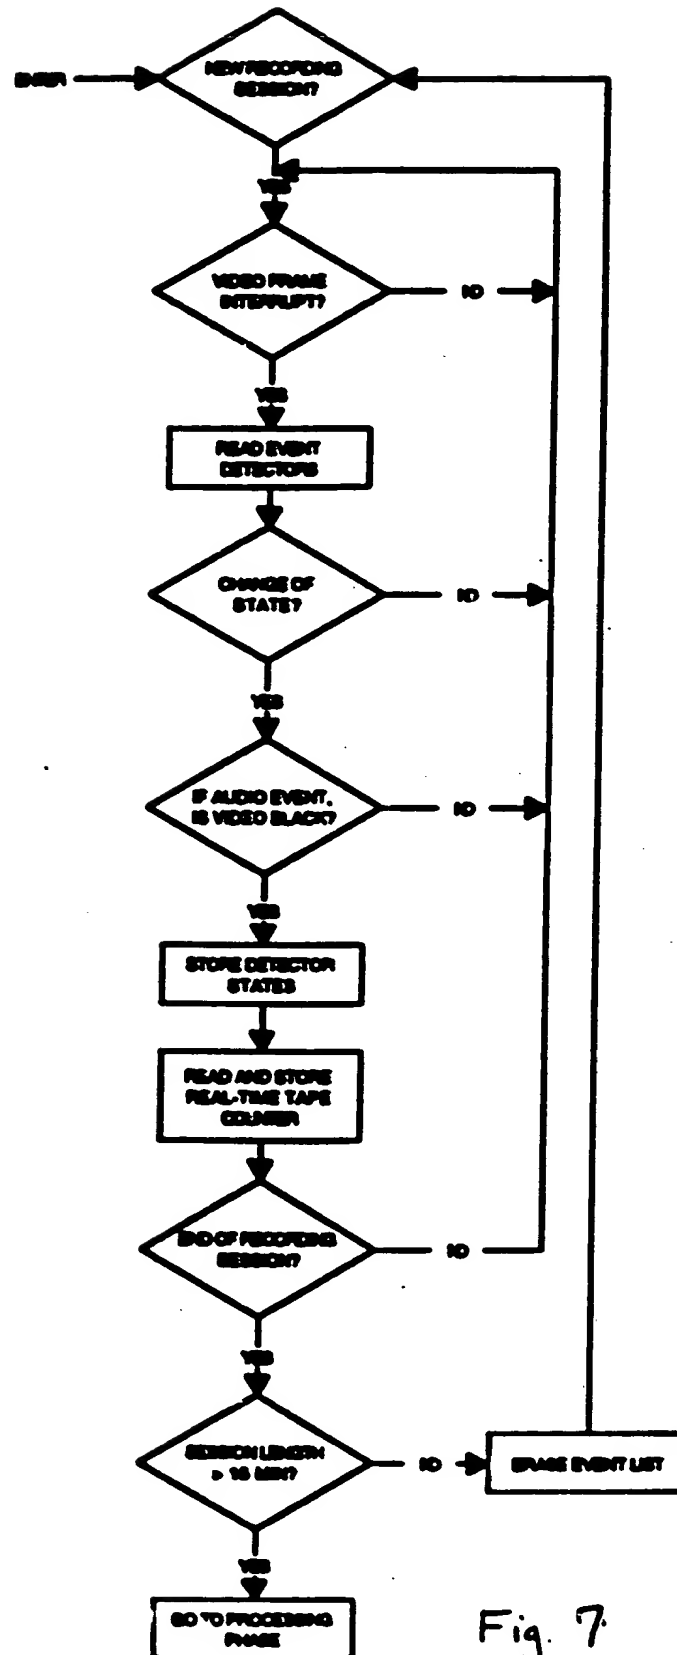


Fig. 7

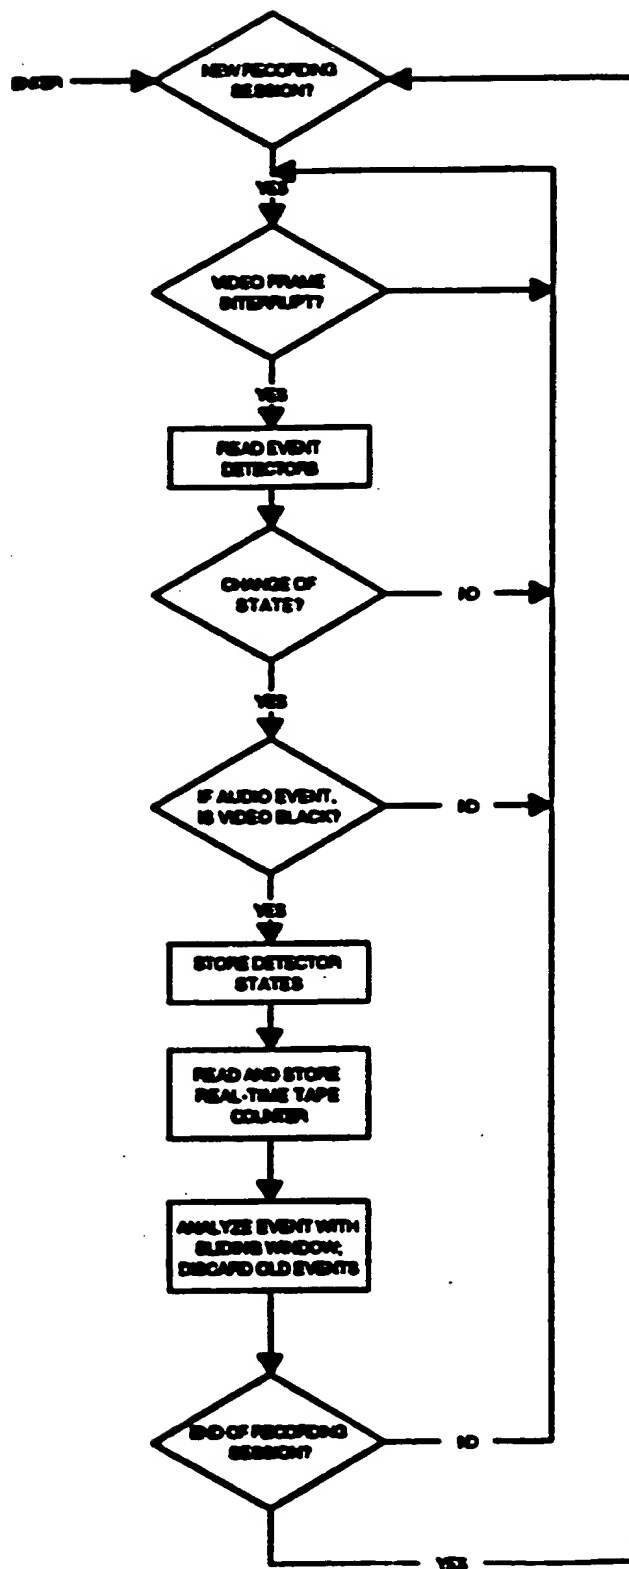


Fig. 8

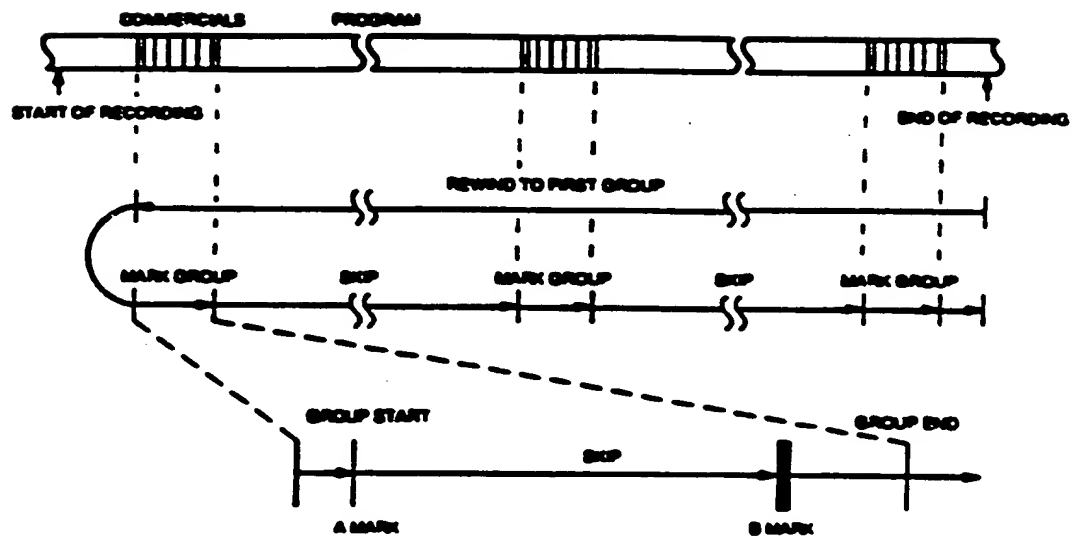


Fig. 9

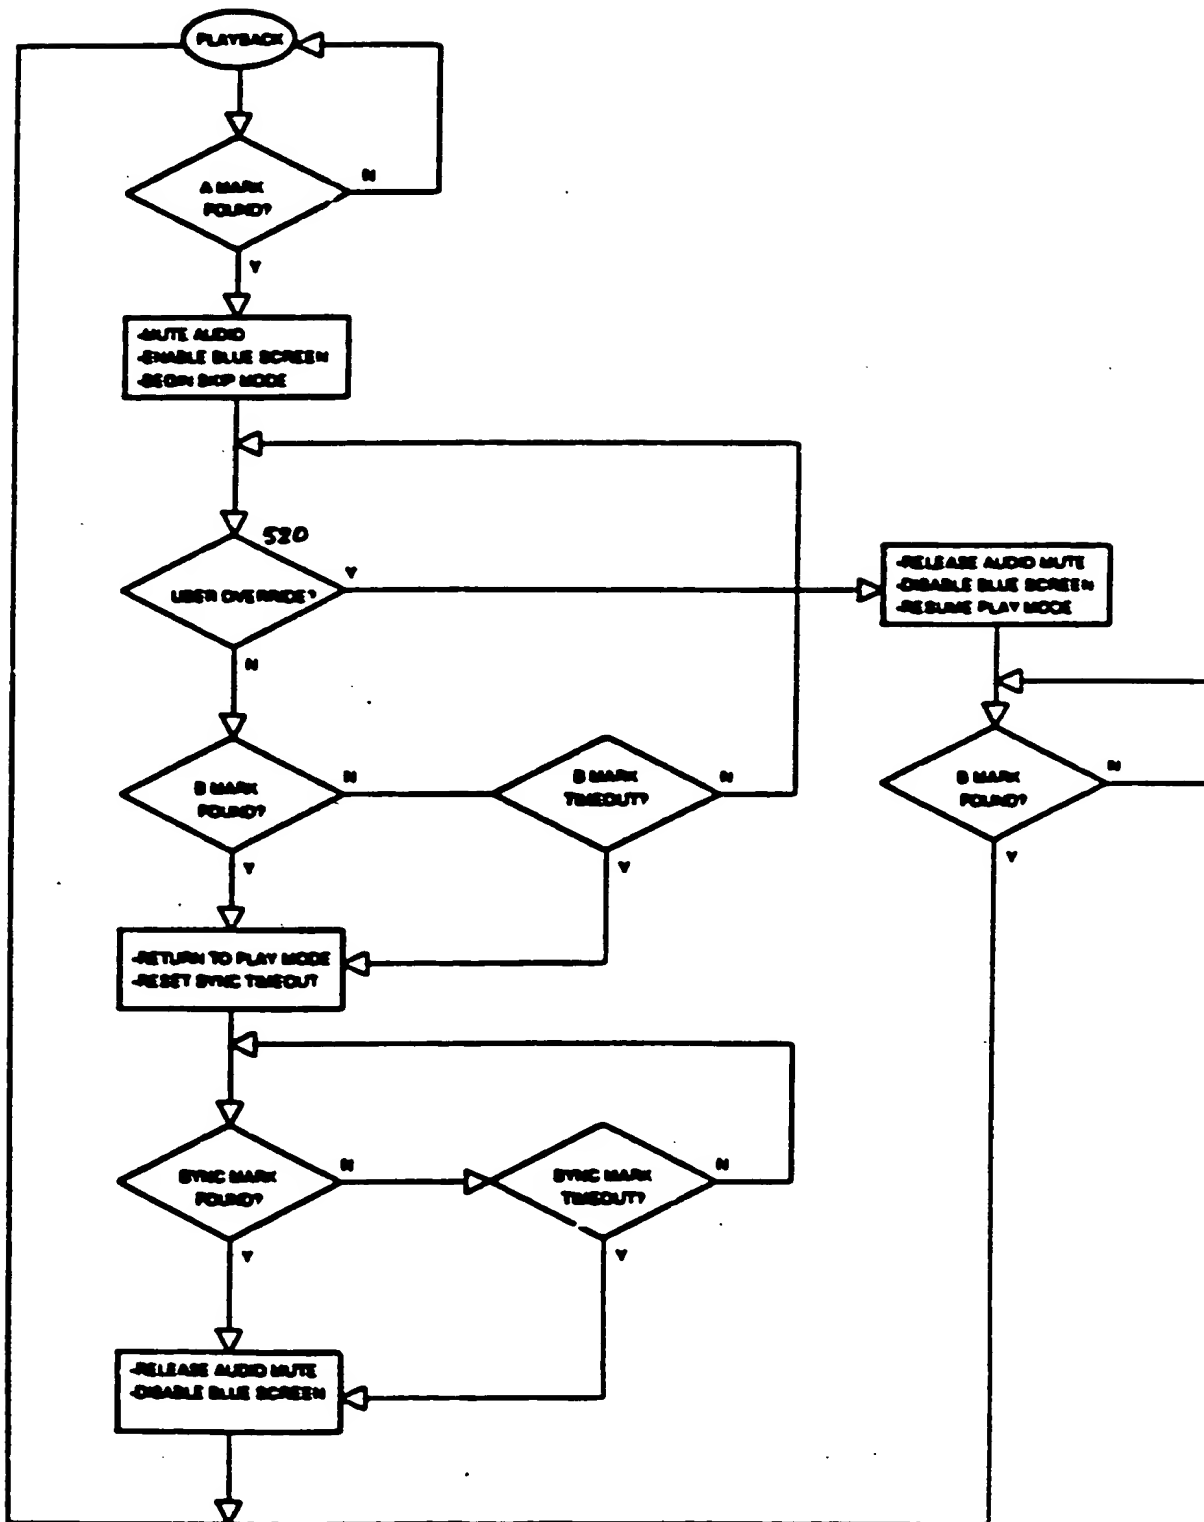


Fig. 10

8/10

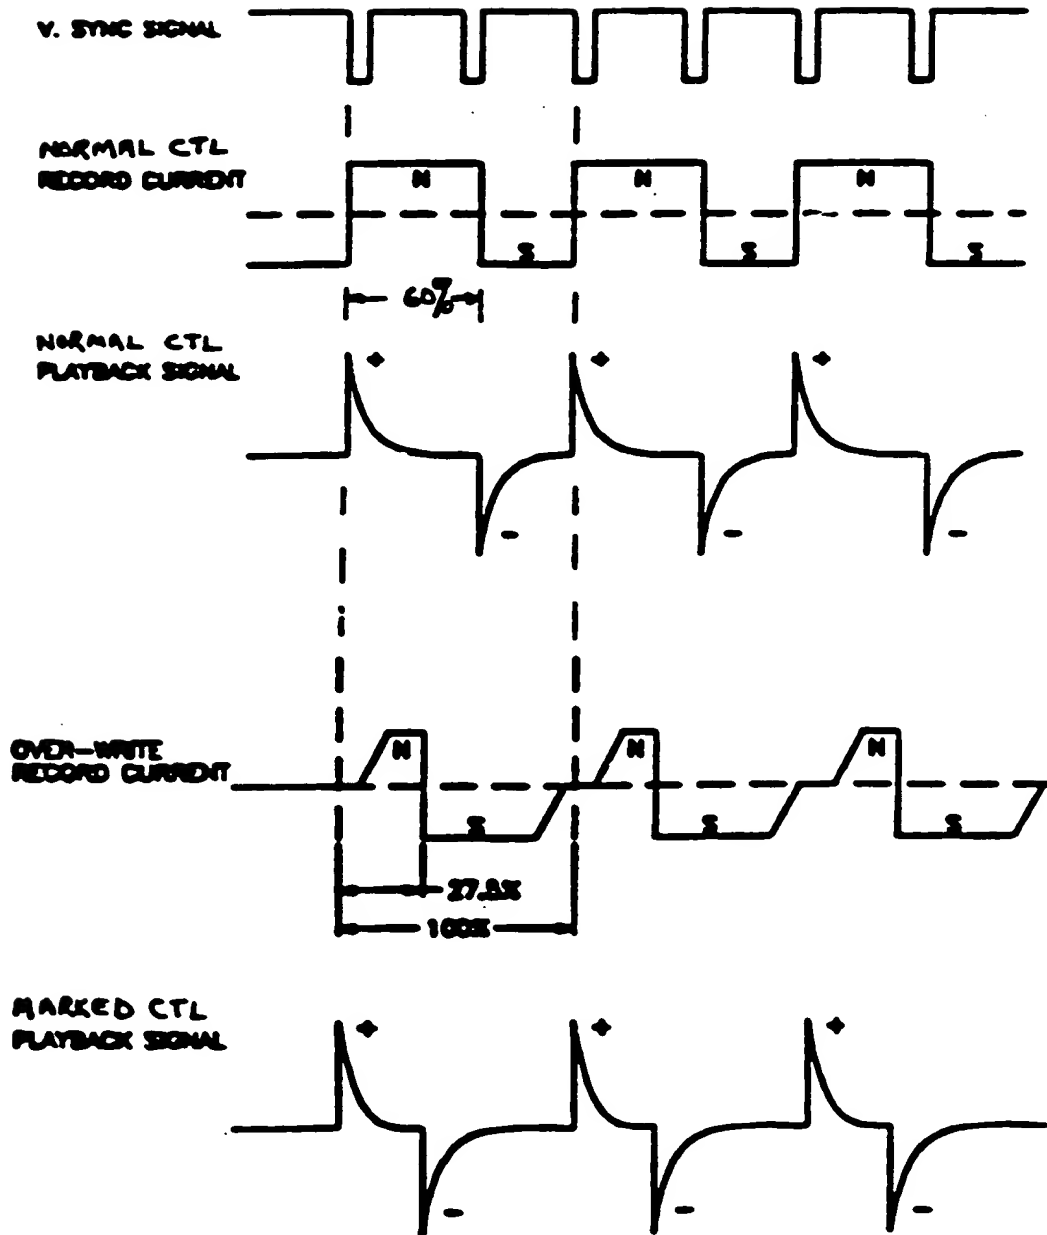


Fig. 11

9/10

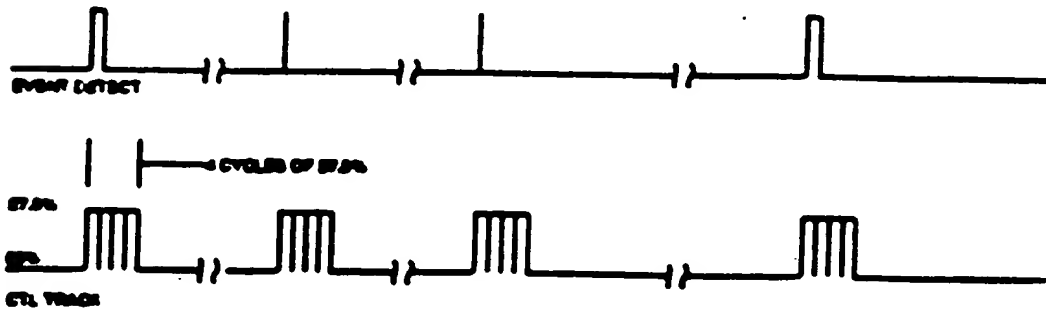


Fig. 12

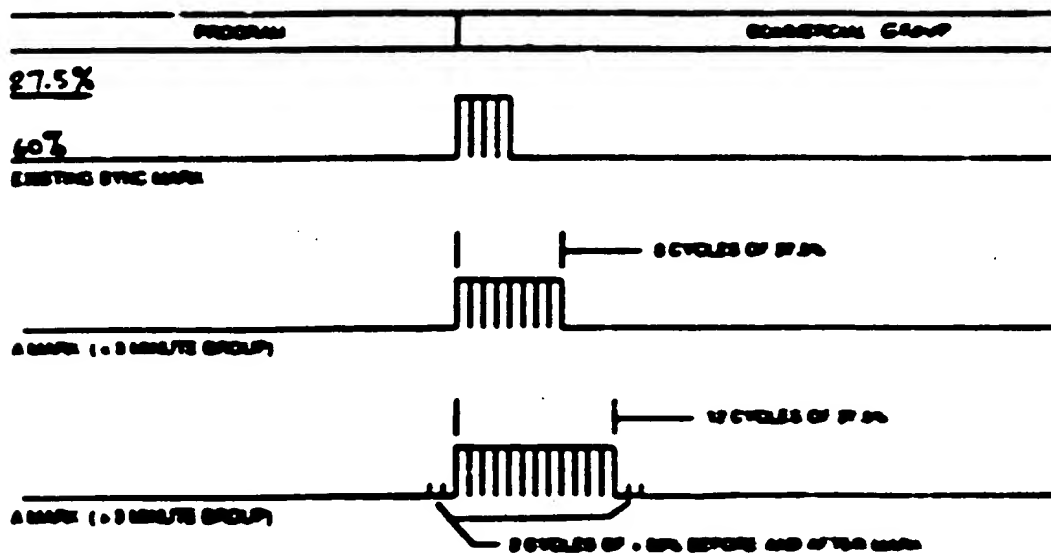


Fig. 13

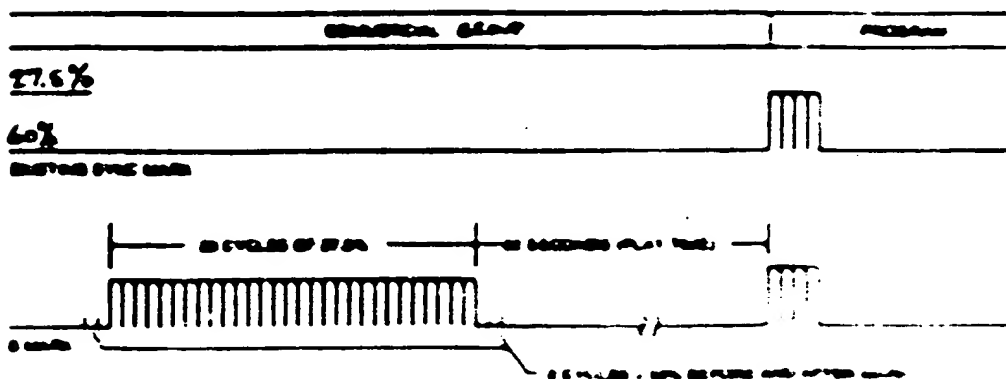


Fig. 14



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/12020

## CLASSIFICATION OF SUBJECT MATTER

PC(6) : H04N 5/76

JS CL : 358/311, 335, 908; 360/14.1, 14.2, 14.3, 33.1, 69, 71

according to International Patent Classification (IPC) or to both national classification and IPC

## FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

J.S. : 358/311, 335, 908; 360/14.1, 14.2, 14.3, 33.1, 69, 71

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	US, A, 5,151,788 (BLUM) 29 SEPTEMBER 1992, FIGURE 3, COL. 7, LINE 51 TO COL. 12, LINE 65.	1-15
	US, A, 4,752,834 (KOOMBES) 21 JUNE 1988, FIGURE 1, COL. 4, LINE 3 TO COL. 5, LINE 41.	1-15
	US, A, 4,750,053 (ALLEN) 07 JUNE 1988, FIGURE 1, COL. 3, LINE 22 TO COL. 7, LINE 64.	1-15
	US, A, 5,333,091 (IGGULDEN ET AL.) 26 JULY 1994, FIGURE 2, COL. 3, LINE 31 TO COL. 12, LINE 52.	1-15

Further documents are listed in the continuation of Box C.

☐

See patent family annex.

## Special categories of cited documents:

document defining the general state of the art which is not considered to be part of particular relevance

earlier document published on or after the international filing date

document which may throw doubts on priority claim or which is cited to establish the publication date of another citation or other special reason (as specified)

document referring to an oral disclosure, use, exhibition or other means

document published prior to the international filing date but later than the priority date claimed

"T"

"X"

"Y"

"A"

later documents published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, each contribution being obvious to a person skilled in the art

document member of the same patent family

Date of the actual completion of the international search

NOVEMBER 1995

Date of mailing of the international search report

03 JAN 1996

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks

c/o PCT  
Washington, D.C. 20231

Telex No (703) 305-3230

PCT/ISA/210 (second sheet) (July 1992)

Authorized officer

KHUOI TRUONG

Telephone No (703) 105-4727

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**